




# Compression Latches - Flexi-System

insert driver - fixed grip - stainless steel

## Latches

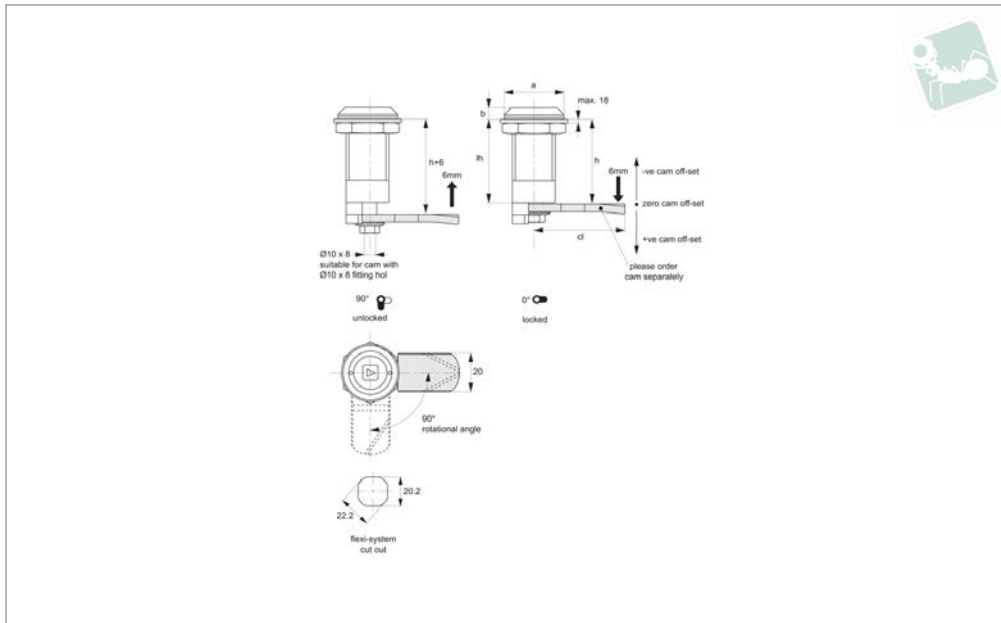

**CC0802**

LATCHES

### Material

Body & insert: stainless steel, AISI 304.  
 Insert fitted with O'ring to provide IP54 rating.  
 Shaft: steel, white zinc plated.  
**Not supplied:** KEY - order separately.

### Technical Notes

Order cam and key separately.  
**Cams:** see suitable cam CC0030 and A0233.  
 Select „without projection“ cam type.  
 Dimensions ch and cl relate to cam. Use

formula to calculate ch (required cam off-set), and refer to cam selection chart;  
 $ch = h - lh$  where;  
**ch** = required cam off-set/height.  
**h** = grip length (distance between inside of latch face and front of cam).  
**lh** = body length of cam latch/lock to be used (see product table below).  
**Keys:** see CC0010.

### Tips

Compression locks provide sealing of

enclosures to reduce vibration and to provide noise isolation.

### Action:

From unlocked position, first 90° turn moves the cam to the locking position. Turn lock 180° to engage compression, cam moves to final fixing position.  
**Provides a 6mm compression stroke.**

| Order No.    | Insert driver | Type       | a  | b | lh |
|--------------|---------------|------------|----|---|----|
| CC0802.M0020 | Square 8      | Fixed Grip | 28 | 5 | 38 |
| CC0802.M0050 | Triangle 8    | Fixed Grip | 28 | 5 | 38 |