



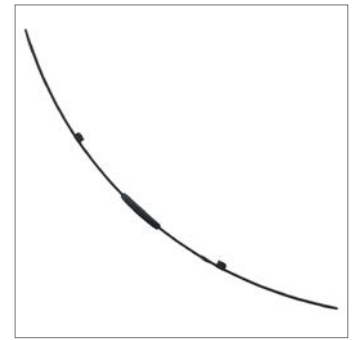

# Lanyard - Cable Tie Loop

thermoplastic

## Lanyards

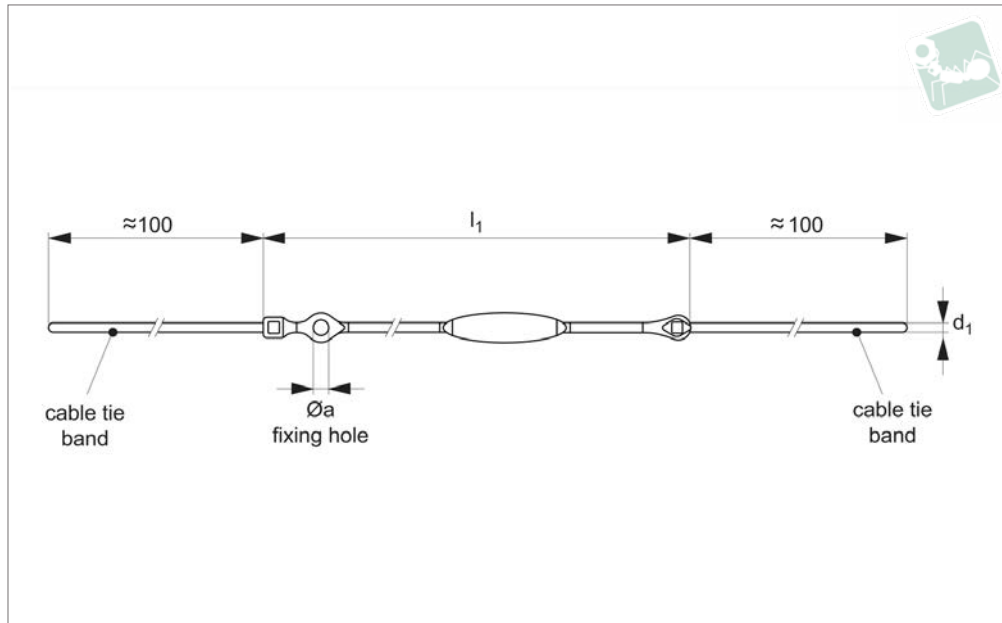

**LA1082**

LANYARDS

### Material

Thermoplastic PA6, grey.

### Technical Notes

Temperature range up to 80°C offers two

### fixing alternatives:

- Cable tie at both ends
- Cable tie one end and fixing hole at other to secure with M4 screw.

### Tips

For use in securing components to assemblies, or to avoid items being misplaced.

Order No.	Coating	$d_1$	$l_1$	$\varnothing a$	Weight g
LA1082.M015-150N	n/a	2.5	150	4.2	2.1
LA1082.M015-250N	n/a	2.5	250	4.2	2.7



### Sound Rigging Systems

Ball lock pins on a sound rigging system. Offering secure fixing with high shear forces and easy fitting for operators at heights.


In addition full black powder coating of grip and actuation button eliminates glare from other stage lighting.



### Gym Equipment



### Scientific and Medical

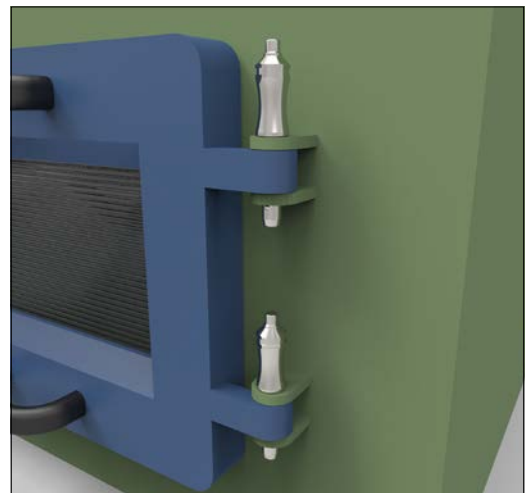



# Wixroyd Ball Lock Pins

features

## 33060 - 33250

### Positioning Elements

#### Pin Material

1.4305 (AISI 303) - shear force approx. 60% of higher material version 1.4542

1.4542 (AISI 630) - identified by the ridge on the pin

CRES 17-4PH (AMS 5643) aviation standard



#### Handle Style



Plastic tri-star

T-handled, metal

L-handled, metal

Mushroom, metal

Single piece metal, contoured



Special plastic self-spring

Adjustable grip length, plastic


Key ring

Safety, metal

Mushroom Type B aviation

Type R aviation

#### Lanyards and Locating Bushes

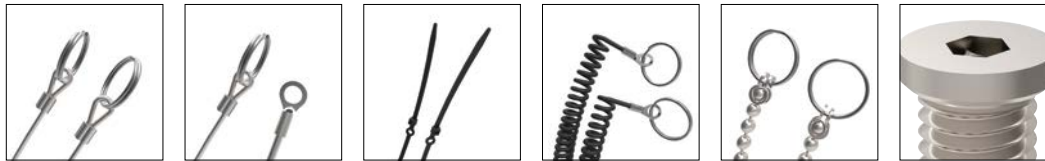

Stainless wire - (coated) - 2 x key ring

Stainless wire - Key ring and fixing loop


Plastic - 2 x cable tie

Steel wire - (coated) - 2 x key ring

Stainless bead chain - 2 x key ring

Locating bushes

#### Actuation

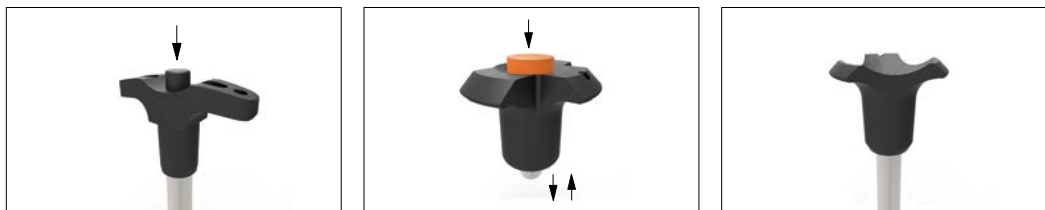

Press = unlock  
Release = lock (standard)

Press = unlock and position  
Release = lock and simultaneous clamp


Simple spring loaded balls "pullout pin"

#### Important Note


**Important Note: Ball lock pins are not suited to lifting applications!**  
For quick release lifting pins, see part 33400.



Shear force



Lifting force



#### Special Variations




Variations on our standard designs are possible, please contact our sales team for technical assistance. Quick production on specials can be as little as 3 weeks.



### Applications

- Positioning.
- Lifting.
- Locking.
- Indexing.
- Joining.

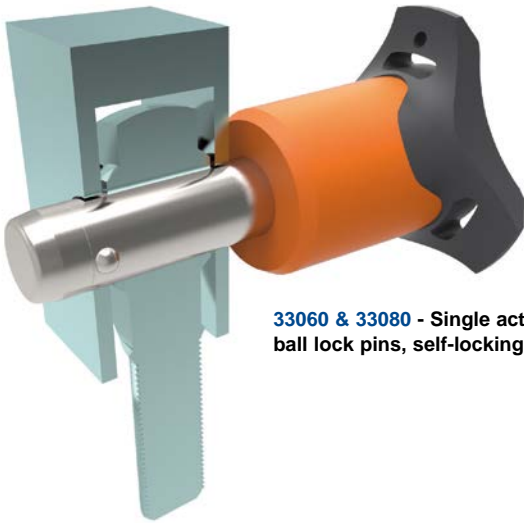

**33060 & 33080** - Single acting ball lock pins, self-locking.



**33194** - Single acting ball lock pins, self locking, simple finish.



**33140** - Socket pins, non-locking, spring loaded balls.



**33100** - Single acting ball lock pin, self locking.



**33180** - Clamping pins, with span compensation, self-locking.



**33250 & 33270** - Lanyards.



**33220** - Ball lock pins, single acting - L-handle