




# Swing Handles - Cam Control

standard cylinder - polyamide

# Swing Handles

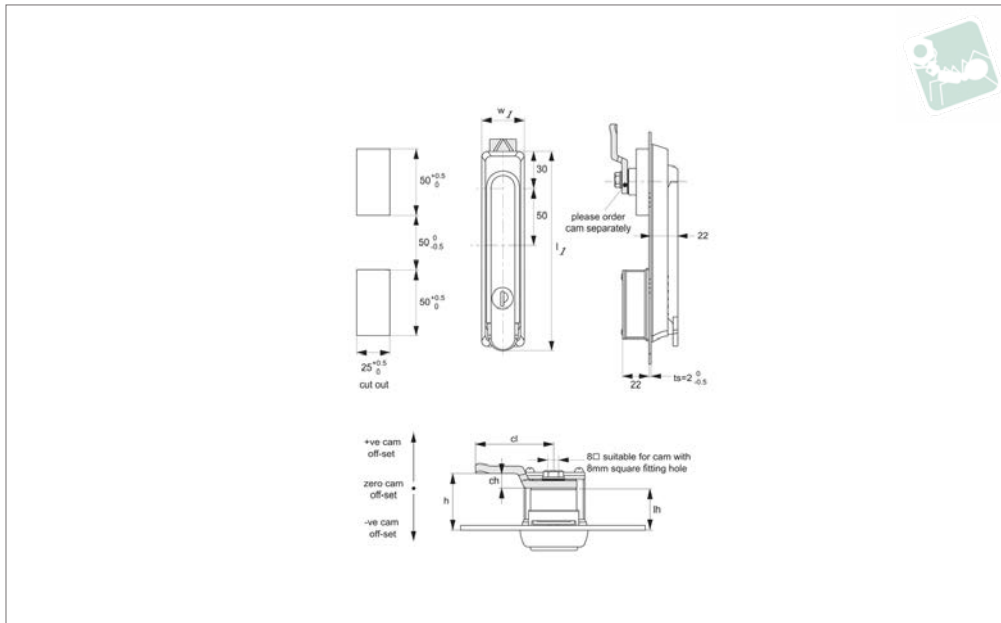

**PL0210**

SWING HANDLES

**Material**

Body & Handle: polyamide PA6, black.  
 Cylinder lock: die cast zinc, chrome plated.  
**Supplied with:** Keys: two per lock.  
**Not supplied:** Cam: order separately.

**Technical Notes**

Order cam separately.  
**Cams:** see suitable cam CC0020, and CC0040. Select „without projection“ cam

type.  
 Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam off-set), and refer to cam selection chart;  
**ch = h - lh** where;  
**ch** = required cam off-set/height.  
**h** = grip length (distance between inside of latch face and front of cam).  
**lh** = body length of cam latch/lock to be

used (see product table below).  
**Rods & Guides:** to achieve 3-point latching - CC0340, CC0350, CC0355.

**Tips**

For use in electrical cabinets, telecom racks or enclosures. Max. panel thickness of 2mm. For use inside of cabinet gasket. Universal left/right.

Order No.	Finish	Lock type	Key type	l <sub>1</sub>	w <sub>1</sub>	lh
PL0210.M0010	Black, Plastic	Std. Cylinder	Keyed Alike	160	35	16